



PLUS WRP001 INSTALLATION GUIDE

IG_PLUS_WRP001_E01A

PLUS WRP001 WIRELESS REPEATER INSTALLATION GUIDE

Table of contents

step
01 **WRP001 PLUS WIRELESS REPEATER CONFIGURATION**
Pages 2 to 8

step
02 **SITE SURVEY MODE**
Pages 9 to 10

step
01

WRP001 PLUS WIRELESS REPEATER CONFIGURATION

step

01

CONNECT AND CONFIGURE THE PLUS WIRELESS REPEATER


01

Loosen the 4 screws of the case and open it.




02

Connect a micro USB cable to the computer and then to *WRP001 PLUS Wireless Repeater*.

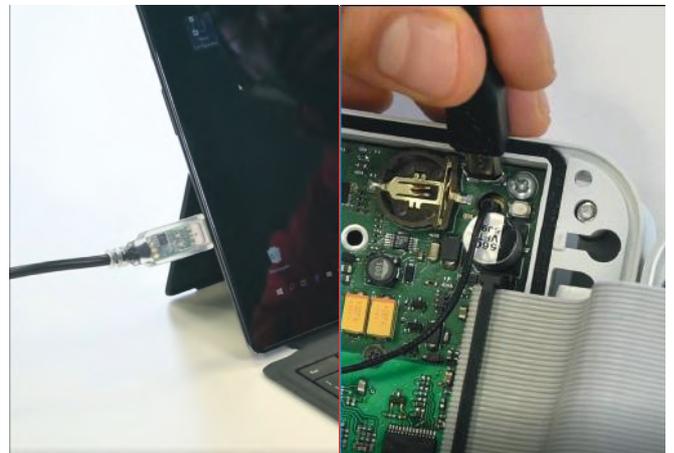

03


Open a new window of *Tekon Configurator Software* and select *PLUS >> Repeater* menu.

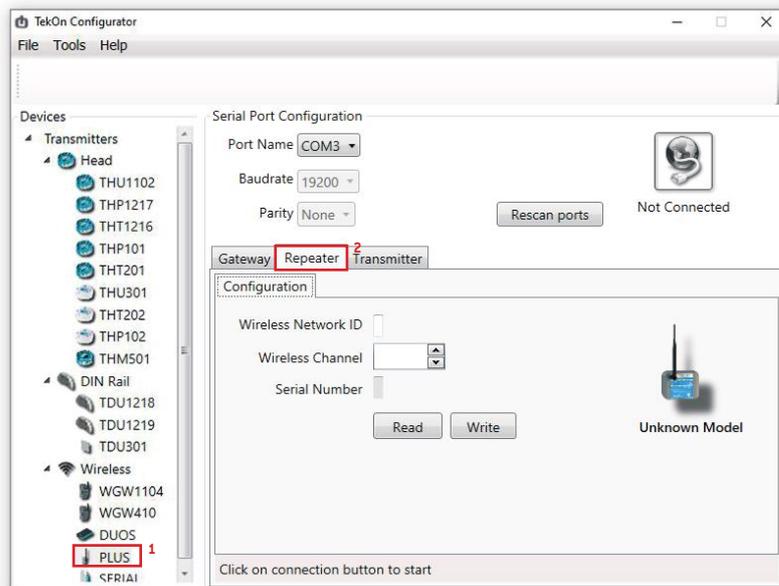

CONNECT AND CONFIGURE THE PLUS WIRELESS REPEATER


04

Click on *Rescan Ports* button.

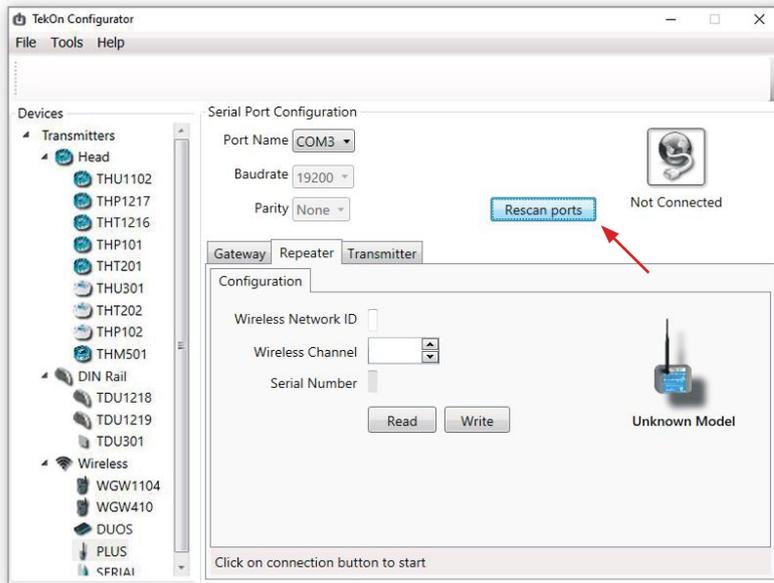

05

Select corresponding *Port name*¹.

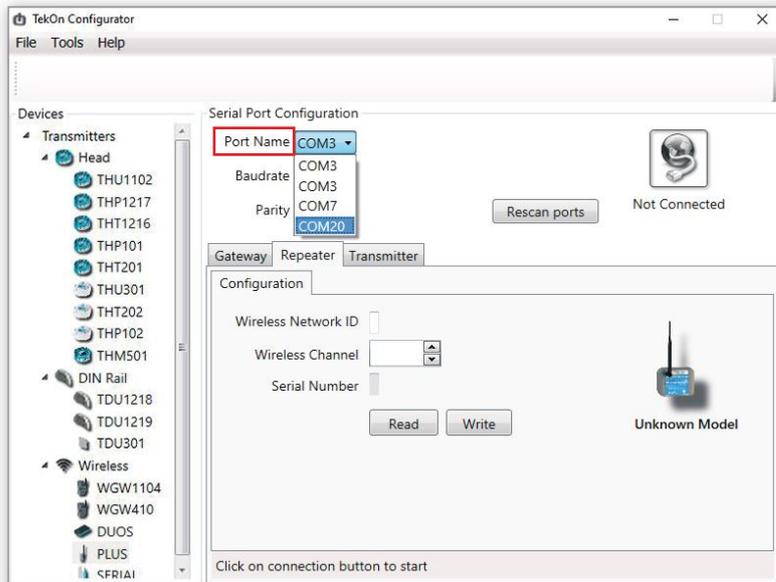



¹ You can check device's serial port name in "Device Manager" on Microsoft® Windows® operating system.

step
01

CONNECT AND CONFIGURE THE PLUS WIRELESS REPEATER

06

Click on *Configuration Mode* (🌐) button.

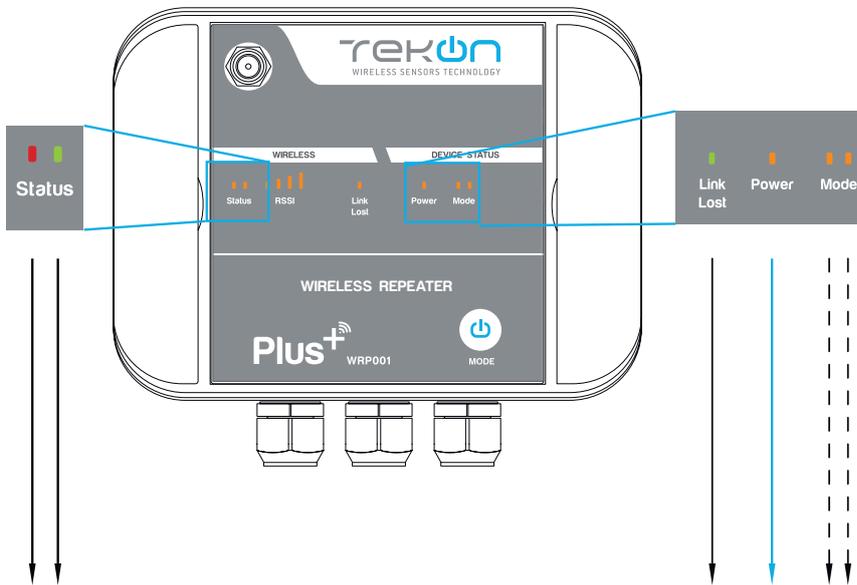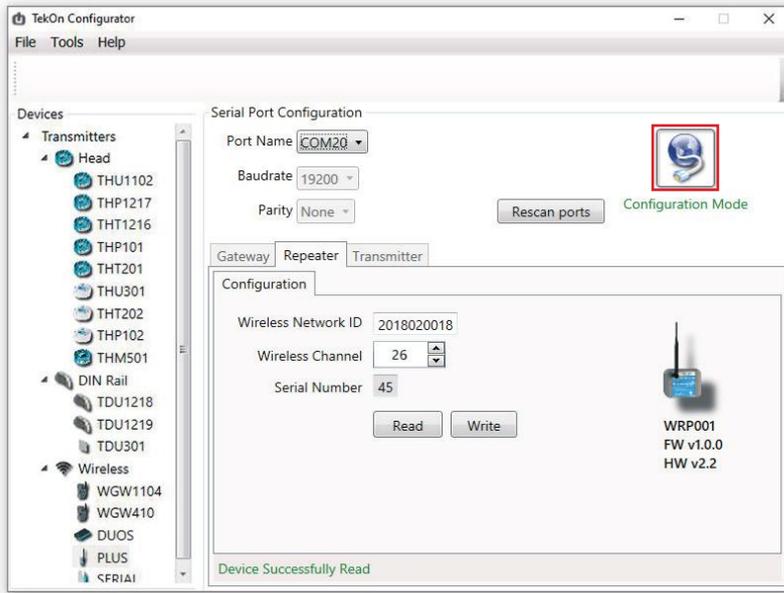


- > LED permanently on
- - - - -> LEDs flashing until wireless connection is established
- > LED permanently off

CONNECT AND CONFIGURE THE PLUS WIRELESS REPEATER

07


Configure *Wireless Network ID* and *Wireless Channel* previously obtained from *Gateway*.

Click on *Write* button to update *Transmitter* settings.

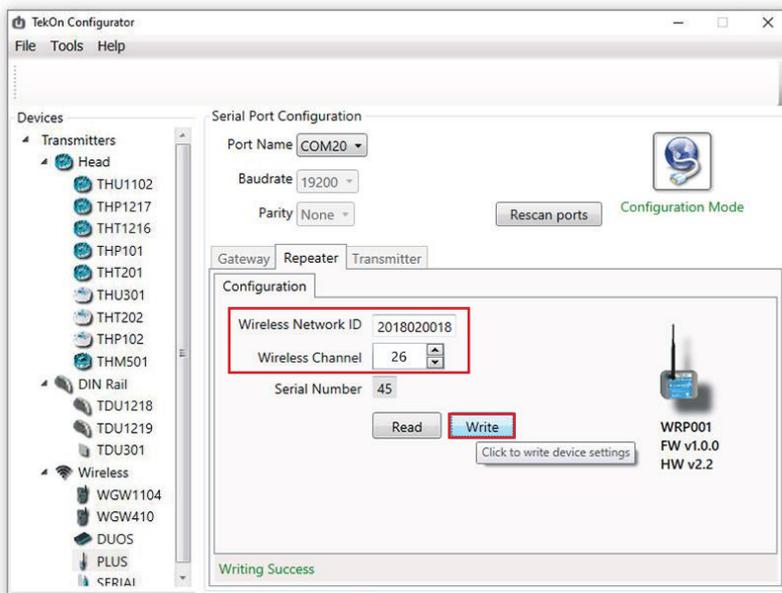

08


Click on *Configuration Mode* (🌐) button to exit setup and resume normal operating mode.

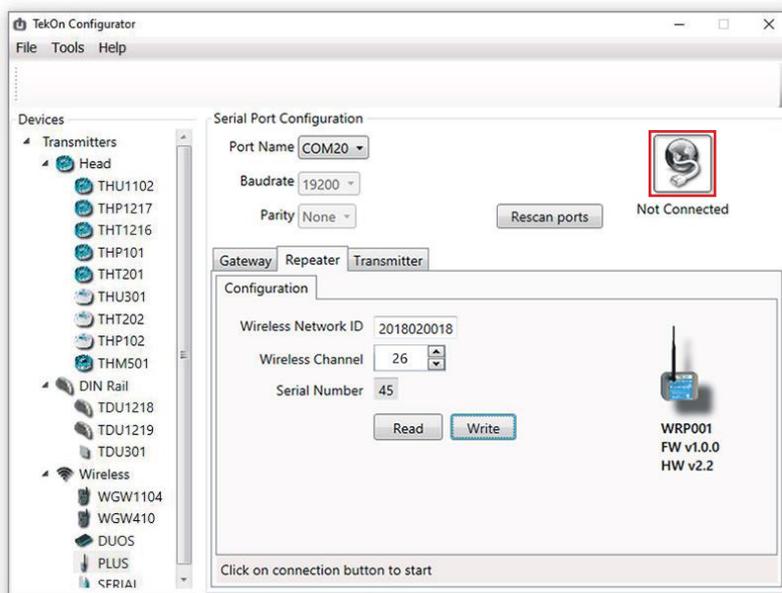

step

01

CONNECT AND CONFIGURE THE PLUS WIRELESS REPEATER

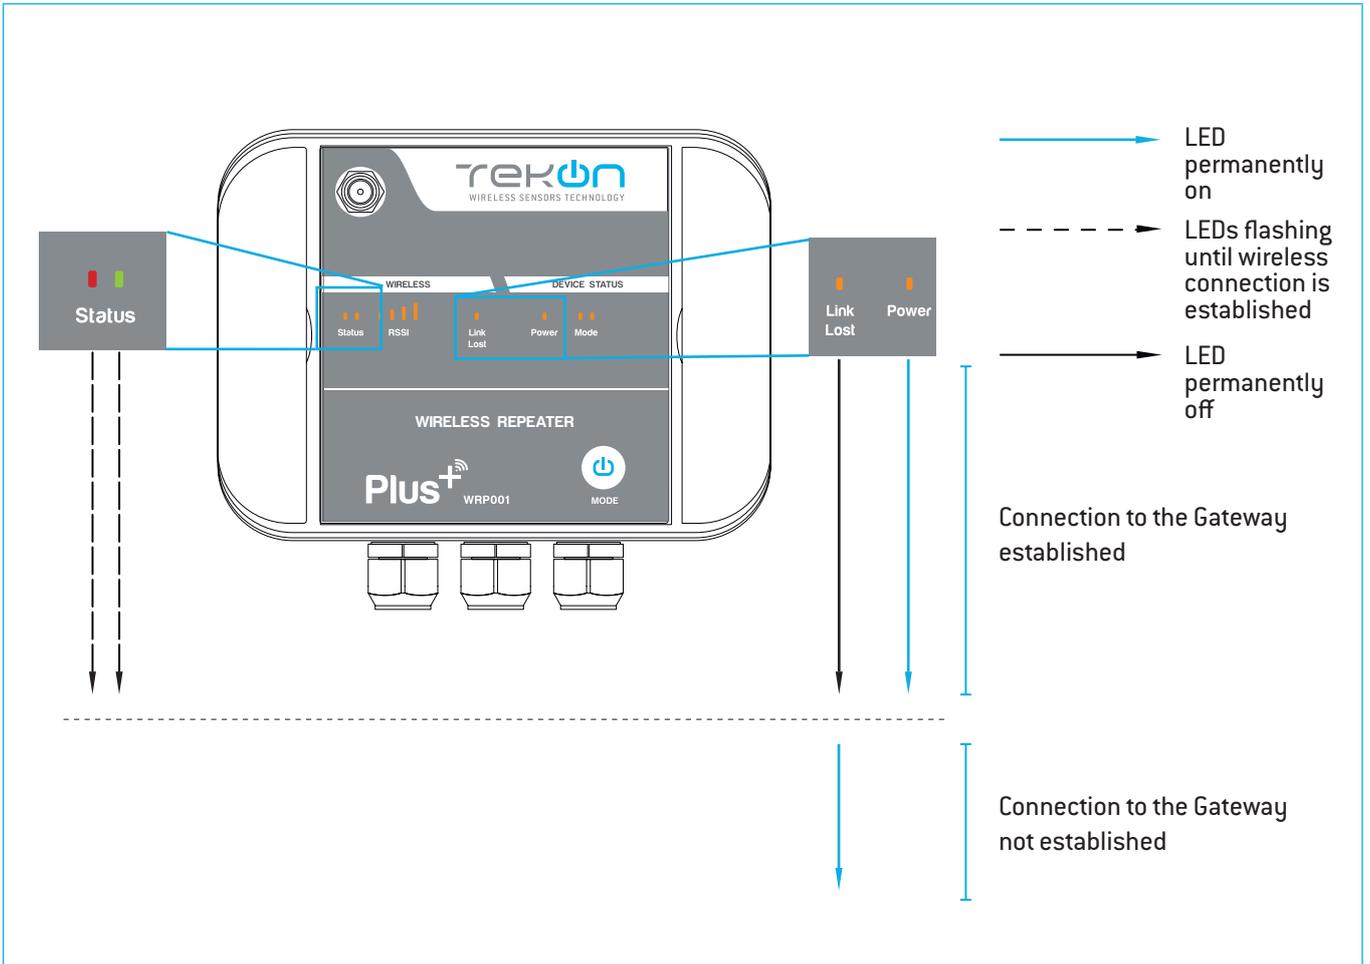

step
02

SITE SURVEY MODE

step
02 | SITE SURVEY MODE


Site survey mode is a tool that allows a quick wireless signal strength evaluation at the site of installation. It doesn't require additional equipment or software.

This feature is available in all the transmitters and repeater from PLUS Product Family.

01

Press and hold Mode () button until Status LEDs are permanently on and Mode LEDs flash.

RSSI LEDs indicate the signal strength.

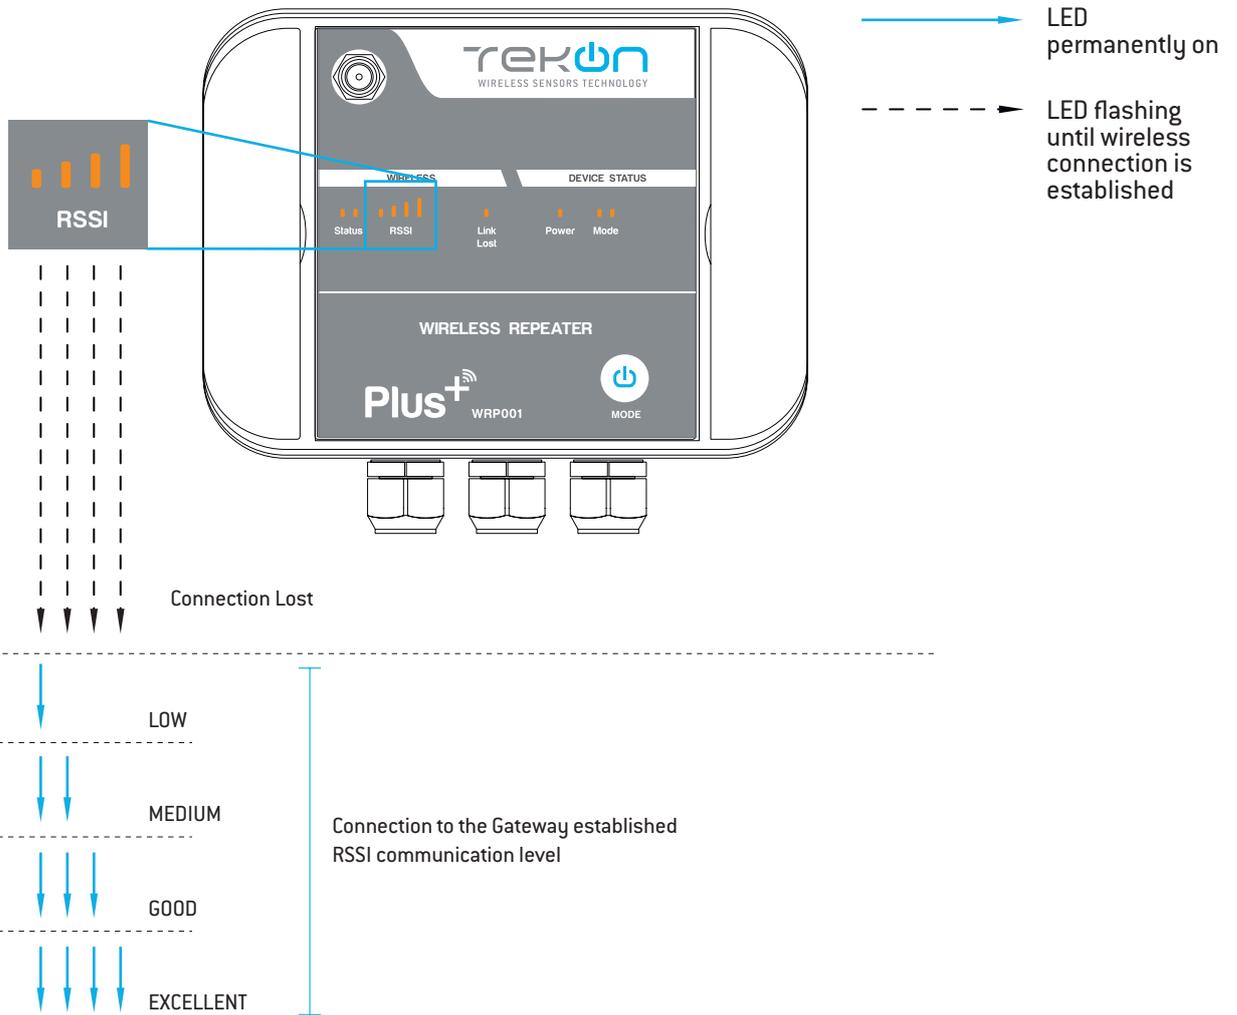

02

Press and hold Mode () button until RSSI LEDs switch off and device resumes normal operation mode.

TEKON ELECTRONICS

a brand of Bresimar Automação S.A.

Avenida Europa, 460
Quinta do Simão
3800-230 Aveiro
PORTUGAL

Sales

P.: +351 234 303 320
M.: +351 933 033 250
E.: sales@tekonelectronics.com

Technical Support

E.: support@tekonelectronics.com

