

PLUS TWP-4AI4DI1UT WIRELESS TRANSMITTER



The PLUS TWP-4AI4DI1UT Wireless Transmitter System is a complete solution to easily gather the data needed to identify production issues and implement measures to increase efficiency and prevent future disruptions.

PLUS TWP-4AI4DI1UT Wireless Transmitter was designed to monitor 4..20 mA / 0..10V signals, digital inputs, and universal temperature inputs, providing a secure communication, without cable requirements of a complex wired solution. Conductivity, vibration, humidity, flow, level, pressure and temperature are some examples of industrial process variables, possible to be monitored and controlled.

Dimensions: 120 x 90 x 50 mm

Weight: 314 g

Material: ASA+PC-FR (UL 94 V-0) / Polycarbonate

Protection Index: IP65

KEY FEATURES

4 CONFIGURABLE ANALOG INPUTS

4 CONFIGURABLE DIGITAL INPUTS

1 UNIVERSAL TEMPERATURE INPUT

1 REMOTE SWITCH OUTPUT

MULTI-HOP MESH NETWORK

WITH SELF-FORMING, SELF-HEALING AND SELF-OPTIMIZING FEATURES

OPERATING MODE

AS END DEVICE / AS REPEATER

SITE SURVEY FEATURE

SIMPLE AND INTUITIVE USB CONFIGURATION

TEKON CONFIGURATOR SOFTWARE

TECHNICAL SPECIFICATIONS

RADIO SPECIFICATIONS	868MHz	915MHz
Range ¹	Up to 4Km LoS	
Frequency Band	868 to 869MHz	902 to 928MHz ⁴
Radio channels	16	50 ⁵
Radio receiver sensitivity ²	-97 to -110 dBm	
Power ²	25 to 27 dBm	8 to 27 dBm
Radio transmission rate ²	19 to 76,8kbit/s	
Encryption method	AES 128 (Advanced Encryption Standard)	
Modulation	GFSK	
Connection	SMA	
Antenna	Articulated dipole antenna	
Antenna impedance	50Ω	

WIRELESS NETWORK

Maximum devices	55
Maximum hops	13
Communication period	1 to 43200 seconds (configurable)

INPUT
RESISTANCE THERMOMETER (RTD)

Measured variable	Temperature
Sensor type	PT100
Units	°C
Connection	1 Resistance thermometer (RTD) in 3-wire system
Sensor current	200µA
Open-circuit monitoring	Always active (cannot be disabled)
Short-circuit monitoring	Always active (cannot be disabled)
Measuring range	See "Digital measuring accuracy" table
Cable resistance per wire (max.)	50 Ω

INPUT
THERMOCOUPLES (TC)

Measured variable	Temperature
Sensor type	Thermocouples: J, K, N, R, S, T
Units	°C
Connection	1 Thermocouple
Open-circuit monitoring	Always active (cannot be disabled)
Short-circuit monitoring	Not available
Cold junction compensation (CJC)	Integrated resistance thermometer
Measuring range	See "Digital measuring accuracy" table

MEASUREMENT ACCURACY

Reference conditions	
Power supply	12V DC ± 1%
Ambient temperature	23°C

Digital measuring errors	See table "Digital measuring accuracy" table
Internal cold junction	
Accuracy	< ± 0,50 °C
Resolution	0,01 °C
Influence of ambient temperature	
on RTD measurement	< ± 0,001 °C / °C
on thermocouple	Thermocouples J, K, N, T: ≤ ± 0,005 °C / °C Thermocouple R: ≤ ± 0,010 °C / °C Thermocouple S: ≤ ± 0,2 °C / °C
Isolation voltage (test operation)	250 V AC 48 V AC

POWER SUPPLY

Supply voltage	5 to 24V DC ± 5% / USB ⁶
Maximum current	500mA DC @ 5V DC / 100mA DC @ 24V DC
Protection against reverse polarity	

ANALOG INPUTS	CURRENT	VOLTAGE
Range	0 to 24mA	0 to 12V DC
Resolution	0,96uA [15bit]	0,38mV [15bit]
Accuracy	<100uA (<0,5% FS)	<5mV (<0,05% FS)
Input impedance	100Ω	>100kΩ

DIGITAL INPUTS	INPUT TRIGGER	4 DIGITAL INPUTS
Range	0 to 24V DC	
ON detection level	> 4,5V	> 12V
OFF detection level	< 2,5V	< 9V
Type	Sinking	
Impedance	> 4k Ω	Compliant to IEC 61131-2; Type 1, 2, 3
Input current	4,5mA @ 12V DC / 6mA @ 24V DC	2,47mA for Type 3
Maximum current protection	10mA	
Galvanic Isolation	No	Yes
Detection type	State change	
Activation detection (if enabled)	Falling Edge / Rising Edge / Both ³	

DIGITAL OUTPUTS	COMMUNICATION LOSS	REMOTE OUTPUT	EXTERNAL SUPPLY
Range	5 to 24V DC		
Type	Sinking / NPN		
Maximum current protection	90mA		
Start state	ON / OFF / last state ³		
Communication loss state	ON / OFF / last state ³		
Event number activation	1 to 10 ³	N/A	N/A
Activation period before communication	N/A	N/A	0 to 255 seconds ³

INTERFACE

Indication	Frontal Panel LED
------------	-------------------

Switches	External - Site Survey activation Internal - Load Default Factory Settings
Configuration	Internal micro USB connector

MECHANICAL INTERFACE	
Push-in spring terminal blocks (internal)	
Bucins PG-7	
1.5mm ² [0.0591in ²]	
Micro USB internal connector	

OPERATING ENVIRONMENT	ENVIRONMENTAL CONDITIONS	STORAGE CONDITIONS
Temperature		-30 to 80°C
Relative humidity	N/A	≤ 95% (non-condensing)

CASING		
Dimensions	120 x 90 x 50 mm	
Weight	314 g	
Material	ASA+PC-FR [UL 94 V-0] / Polycarbonate	
Protection index	IP65	

FACTORY DEFAULT SETTINGS	868MHZ	915MHZ
Frequency	869,525MHz	915,000MHz
Radio transmit power		27dBm
Radio transmission rate		76,8kbit/s
Wireless channel	13	26
Wireless network ID		13042017
Communication period		10 seconds
Gateway modbus index		1
Analog inputs		OFF
Digital input trigger		Disable
Digital inputs		Disable
Sensor Input		PT100 3W
Digital output - Communication loss		OFF
Digital output - Remote output		OFF
Digital output - External supply		OFF
Operating mode		End Device

CERTIFICATIONS AND APPROVALS
EN 61326-1 - Class B - Industrial Requirements
EN 300 220-2 V3.1.1
EN 301 489-1 V2.2.1
EN 301 489-3 V2.1.1
EN 60950-1:206
EN 61326-1:2013
ETSI EN 301 489-1 V1.9.2

DIGITAL MEASURING ACCURACY

RESISTANCE THERMOMETER (RTD)




Sensor	Range °C	Accuracy °C	Resolution °C
PT100	-210 to 850	< ± 0,2	0,05

THERMOCOUPLES (TC)

Sensor	Range °C	Accuracy °C	Resolution °C
J	-210 to 1200	< ± 1,0	0,077
K	-270 to 1370	< ± 1,0	0,098
N	-270 to 1270	< ± 1,0	0,151
R	-50 to 1760	< ± 1,2	0,189
S	-50 to 1760	< ± 2,0	0,185
T	-270 to 400	< ± 1,0	0,026

DIGITAL INPUTS

TRANSMITTER DI OPERATION

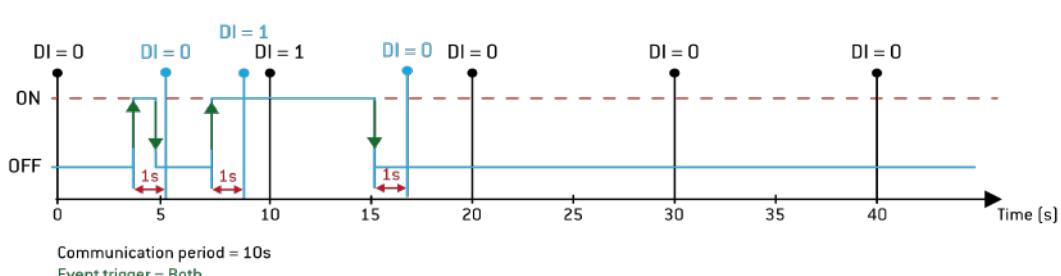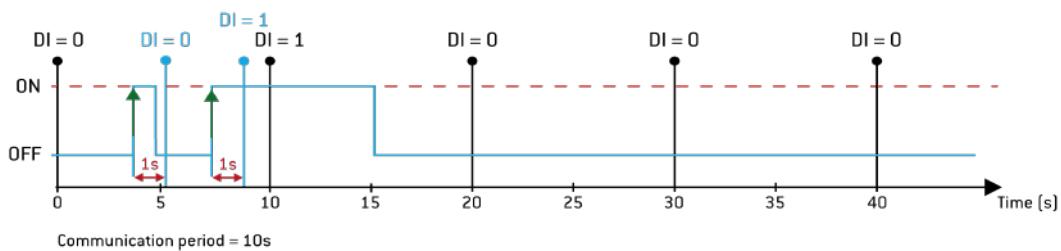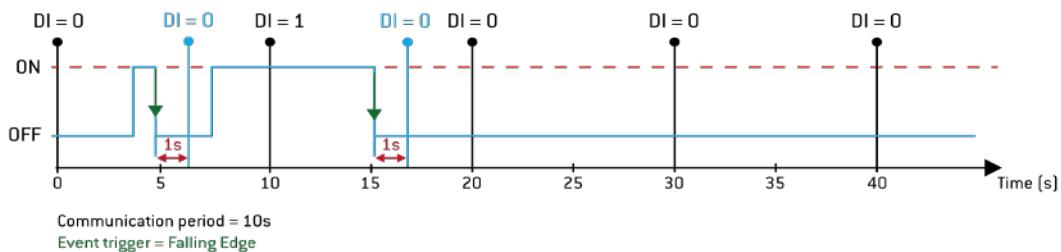

¹ Range depends on the RF propagation environment and Line of Sight (LoS). Always verify your wireless network's range by performing a Site Survey

² Dependent on radio channel selection

³ Configurable


⁴ In some countries, the frequency band admitted is not so extended as the default range.

⁵ The radio frequencies admitted in Australia are available from channel 26 to channel 50.

⁶ It is recommended to use a power supply with short-circuit current protection or equipped with a fuse.



TECHNICAL DRAWINGS

DIMENSIONAL DRAWINGS AND INTERFACE DESIGN

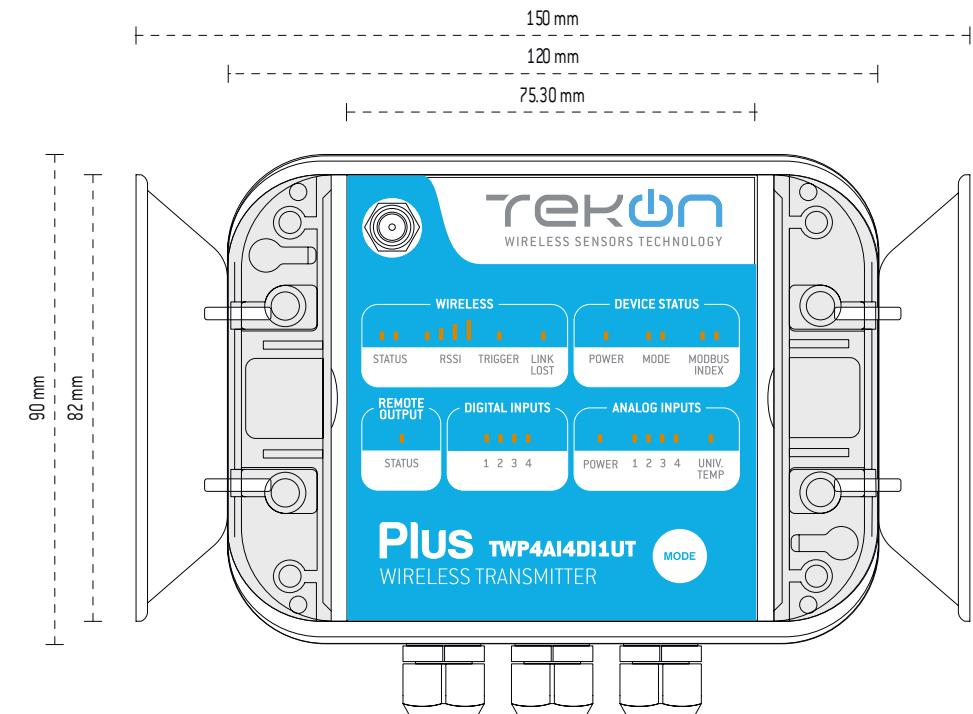


Front view

Rear view

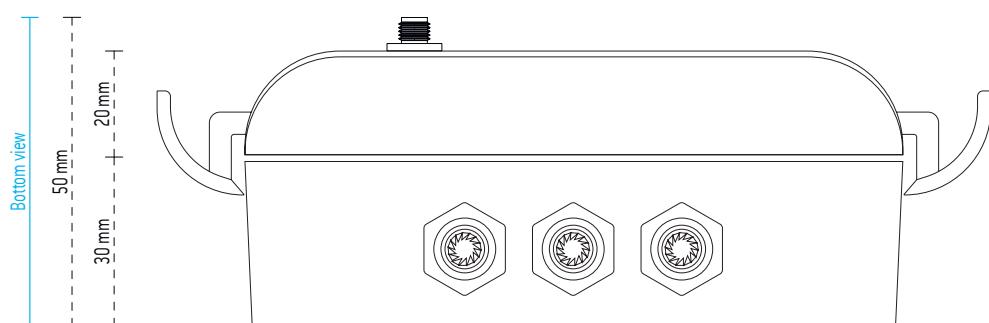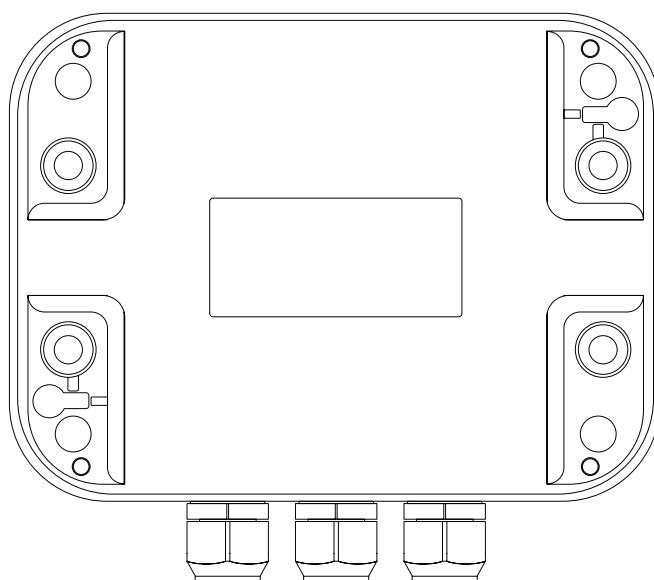

WIRING DIAGRAM

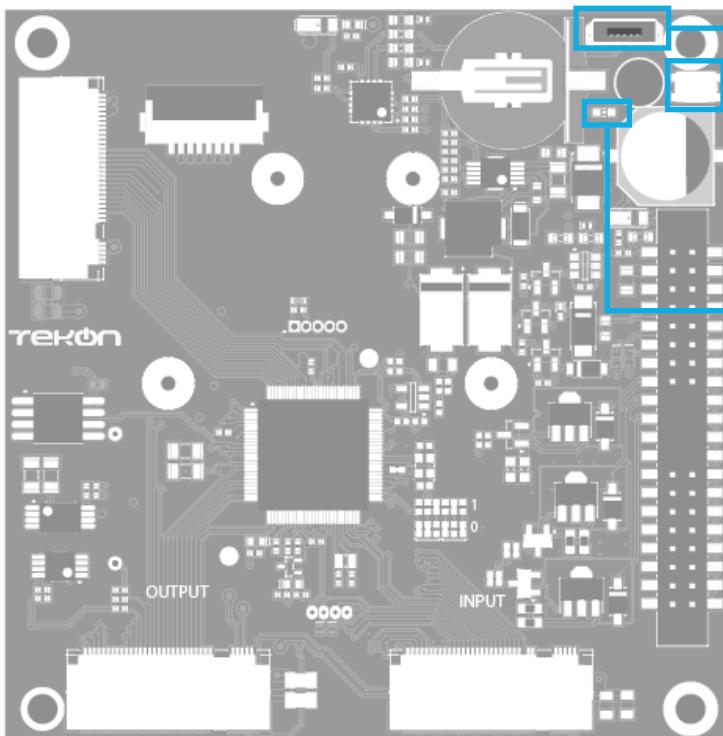**USB Configuration Port**


Allows Tekon device Configuration

Load factory setting button (2 methods)


- Pressing this button during 3 seconds forces the factory settings load and reboot.
- Power ON the device with the button pressed during 3 seconds forces the factory settings load and reboot

Internal LED


Analog Inputs

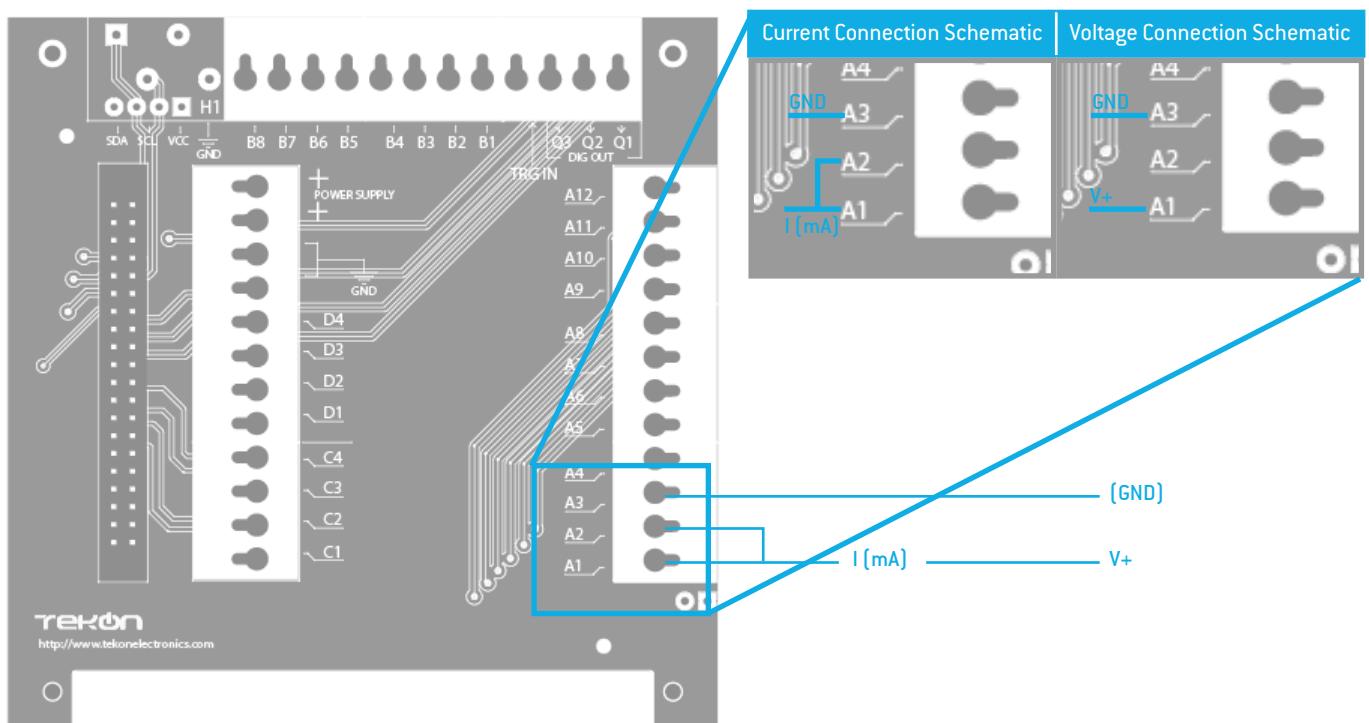


Digital Input Trigger - NPN - SINKING

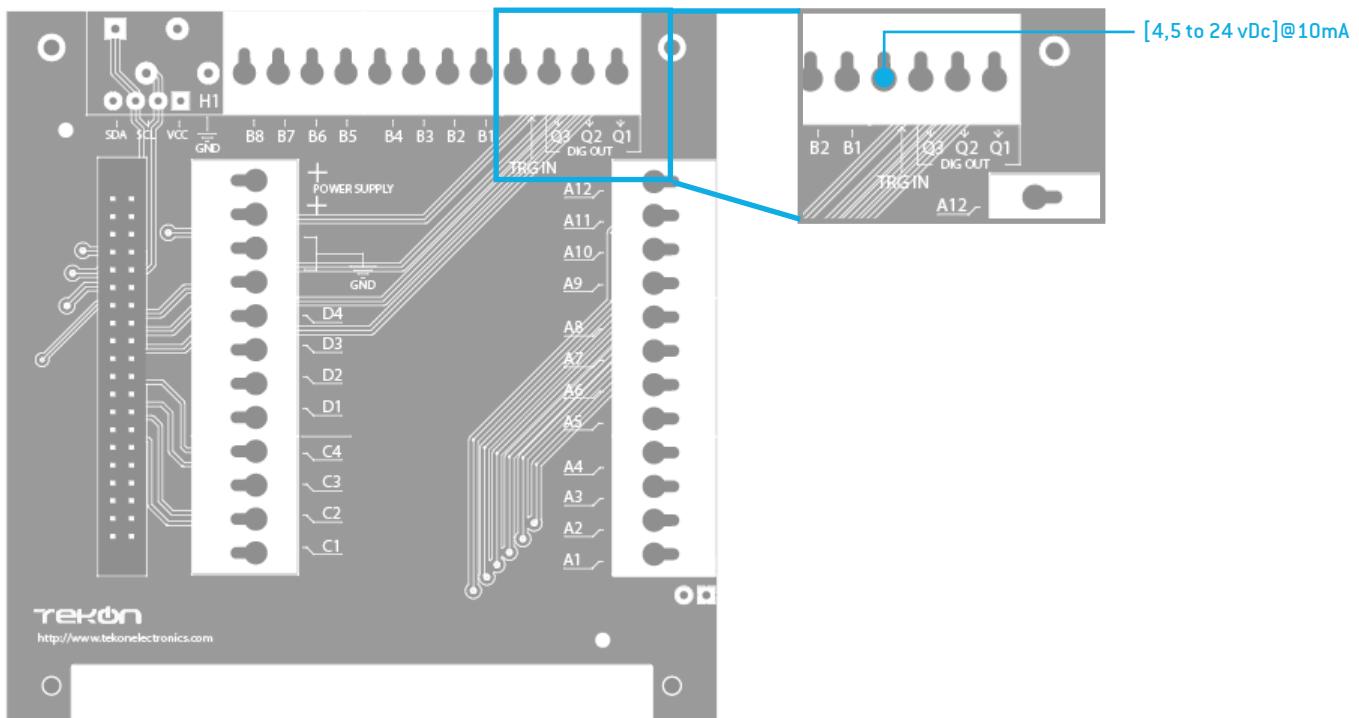

Digital Output - SINKING - NPN

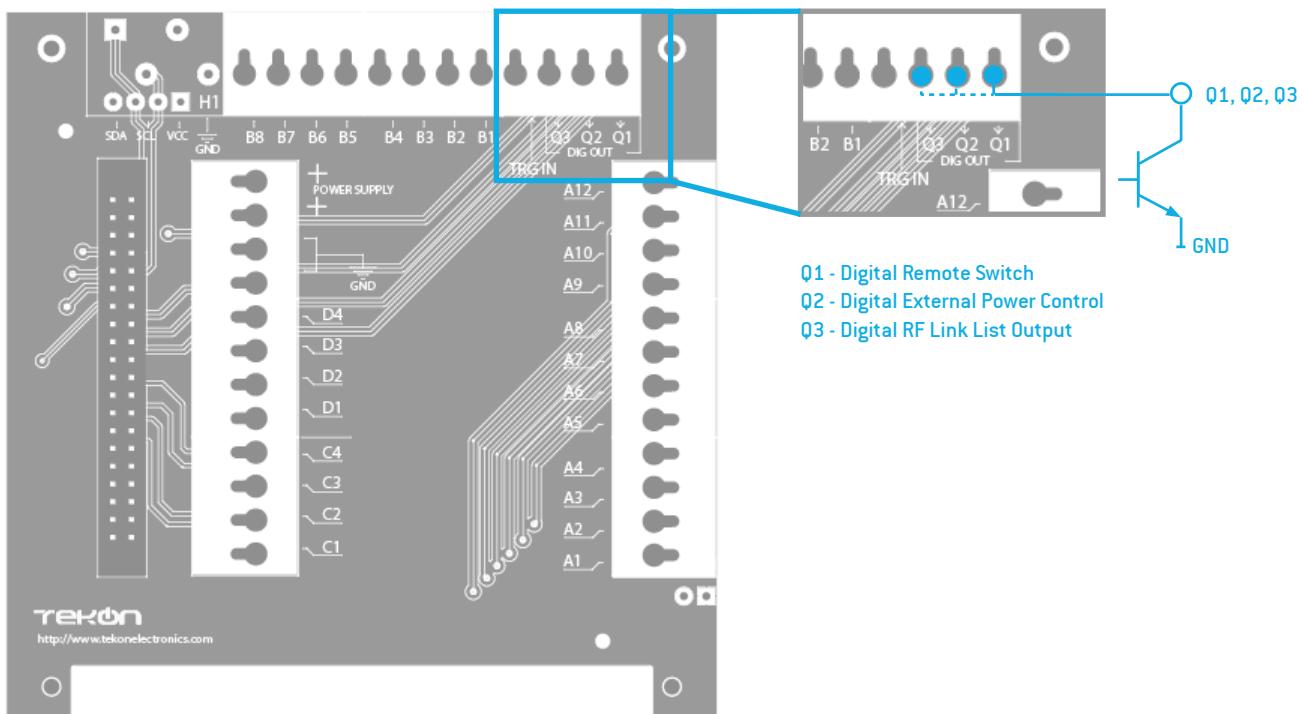



Universal Temperature Input

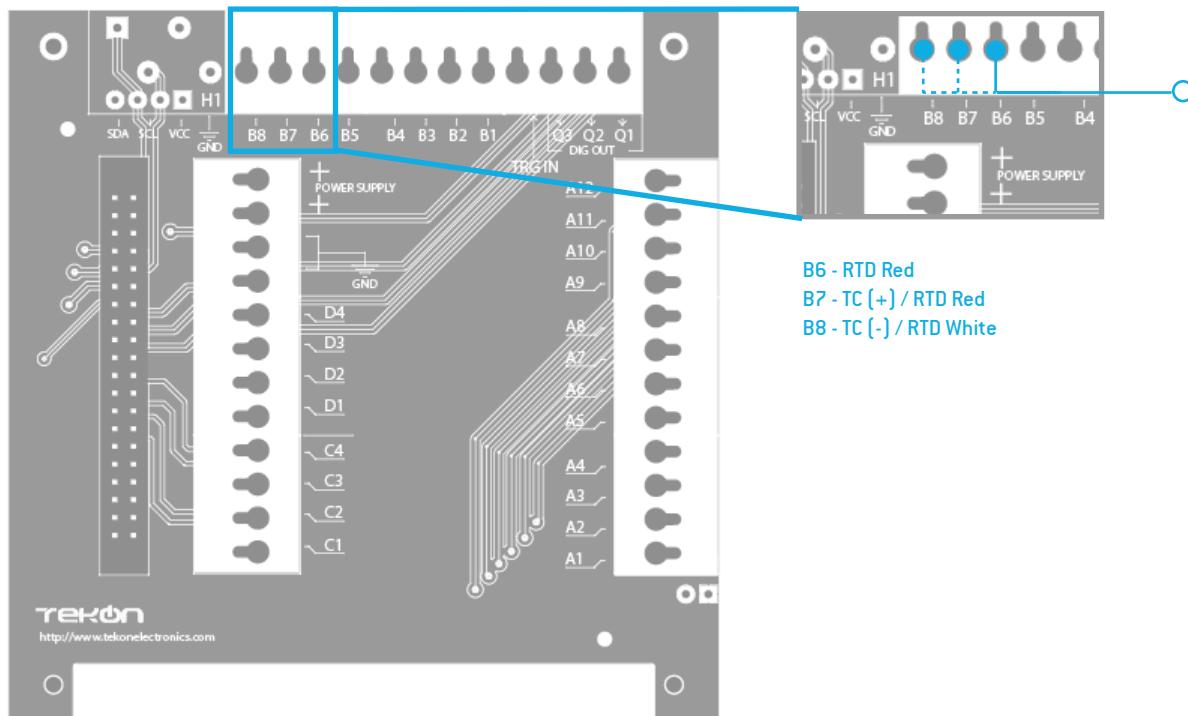


Universal Temperature Input - Physical connections

PT100 3 wire

Thermocouples

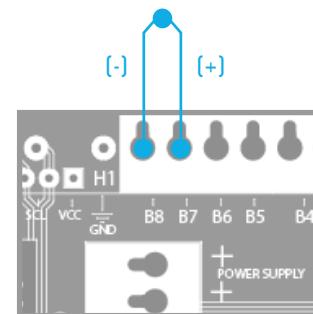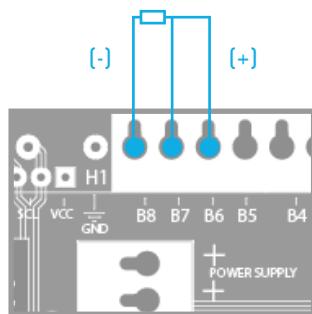

Digital Input - SINKING - PNP

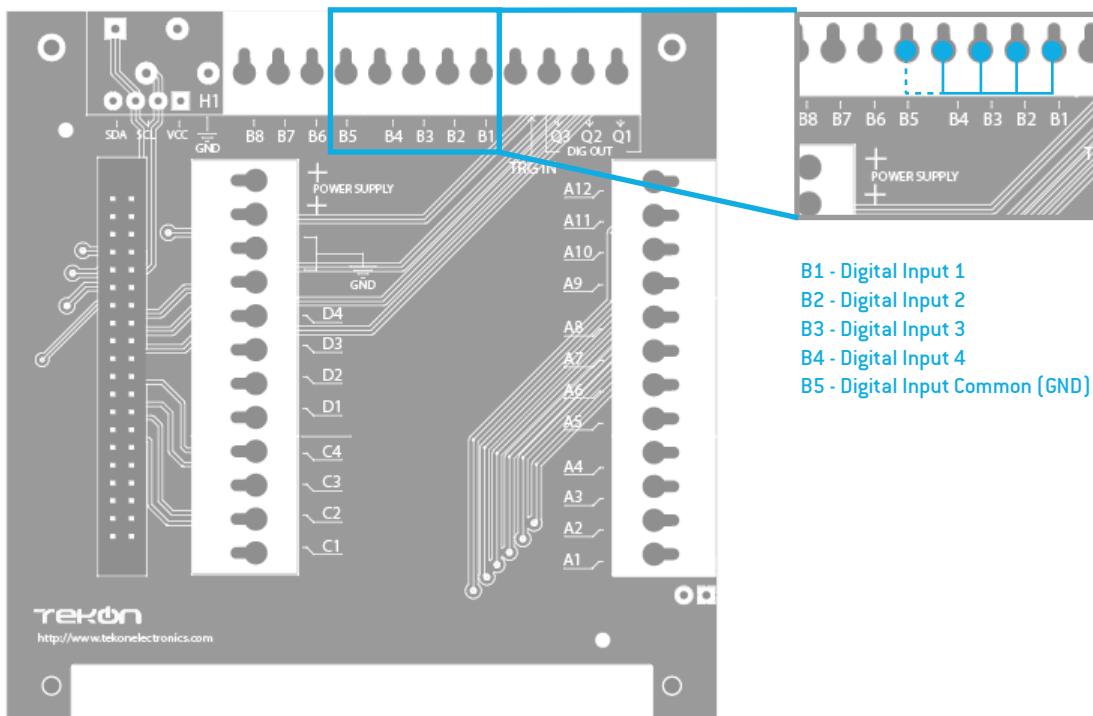

B1 - Digital Input 1
 B2 - Digital Input 2
 B3 - Digital Input 3
 B4 - Digital Input 4
 B5 - Digital Input Common (GND)

Transmitter		
PIN	Functionality	
	Current Mode	Voltage Mode
A1	Analog Input 1	I [mA]
A2		I [mA]
A3		GND
A4	Analog Input 2	I [mA]
A5		I [mA]
A6		GND
A7	Analog Input 3	I [mA]
A8		I [mA]
A9		GND
A10	Analog Input 4	I [mA]
A11		I [mA]
A12		GND
B1	Digital Input 1	
B2	Digital Input 2	
B3	Digital Input 3	
B4	Digital Input 4	
B5	Digital Input Commons (GND)	
B6	Universal Temperature Input	
B7		
B8		

C1	Not used
C2	Not used
C3	Not used
C4	Not used
D1	Not used
D2	Not used
D3	Not used
D4	Not used
TRIG IN	Digital Trigger Input
Q1	Digital Remote Switch Output
Q2	Digital External Power Control Output
Q3	Digital RF Link Lost Output

RELATED PRODUCTS



PLUS WGW420 WIRELESS GATEWAY 868 MHZ / 915 MHZ

REF.: PA164510210 / PA164510220

- Scalable network up to 55 PLUS transmitters;
- Up to 4 Km communication distance (LoS) with 868 MHz/915 MHz and 128-bit AES encryption;
- Multiple networks with extra gateways and extra long range with several repeaters;
- Multi-hop mesh network with self-forming, self-healing and self-optimizing features;
- Modbus RTU communication protocol via RS-485 interface;
- 8 analog outputs (4..20 mA current loop);
- Simple and intuitive USB configuration via Tekon Configurator (free software);
- DIN rail mounting.



PLUS WRP001 WIRELESS REPEATER 868 MHZ / 915 MHZ

REF.: PA164510310 / PA164510320

- Up to 12 repeaters in series for extra-long range;
- Extra repeaters for network redundancy and robustness;
- Up to 4 Km communication distance (LoS) with 868 MHz/915 MHz and 128-bit AES encryption;
- Multi-hop mesh network with self-forming, self-healing and self-optimizing features;
- Simple and intuitive USB configuration via Tekon Configurator (free software).

REVISION HISTORY

VERSION

E01B

Revision of "Certifications and Approvals" table.

TEKON ELECTRONICS
a brand of Bresimar Automação S.A.

Quinta do Simão
3800-230 Aveiro
PORTUGAL

P: +351 234 303 320
M: +351 933 033 250
E.: sales@tekonelectronics.com

Cofinanciado por:



UNIÃO EUROPEIA
Fundo Europeu
de Desenvolvimento Regional